

Hi-Mit Operation Manual

Contents

Download APP	2
Account management.....	2
Create account.....	2
Log in.....	3
Reset password	4
Group management	5
Create group	5
Edit group	7
Invite member	8
Assign rights to members.....	9
Add Hi-Mit.....	10
AP Network.....	10
SCAN	12
Wifi ID.....	13
Replace/ Remove router	14
Search/add device.....	14
Search device	14
Add device	15
Set Hi-Mit attributes.....	16
Edit name of outdoor unit	16
Edit floor/room.....	17
Add room	17
Add floor.....	18
Add in bulk.....	18
Edit floors/rooms.....	19
Delete/add devices.....	19
Add scene.....	20
Create manual scene.....	20
Create timed scene	22
Create temperature linkage scene.....	23
Control air conditioner.....	24
VRF.....	24
Water module	25
Me	26
Function introduction.....	26

Download APP


This App can be downloaded from the Apple Store for iOS phones or from the Google Play Store for Android phones by searching the store with the keyword “Hi-Mit”.


This App supports iOS10.0 or above and Android 6.0 or above system versions. For the mobile phones with lower versions, you need to upgrade the system before you can use functions of the App normally.

Account management

Create account

- 1 When running the App for the first time, click the “Get Started” to create an account.
- 2 Click “Privacy Policy Hi-Mit” and “End User Terms and Conditions” to view contents of the terms, and tick “√” in the “Select Box” before the terms to confirm contents of the terms, and click “Agree”.
- 3 Enter a valid email address and click “Register”.
- 4 Check the six-digit verification code received in your email, enter the verification code into the App page, and click “Next”.
- 5 To set a password, click the “Set Password”. Note: The password only supports 8-30 digits of numbers and characters.
- 6 Enter your personal information and click “Submit”. Note: The “First Name”, “Surname”, “Country/Region” and “Language” are required.

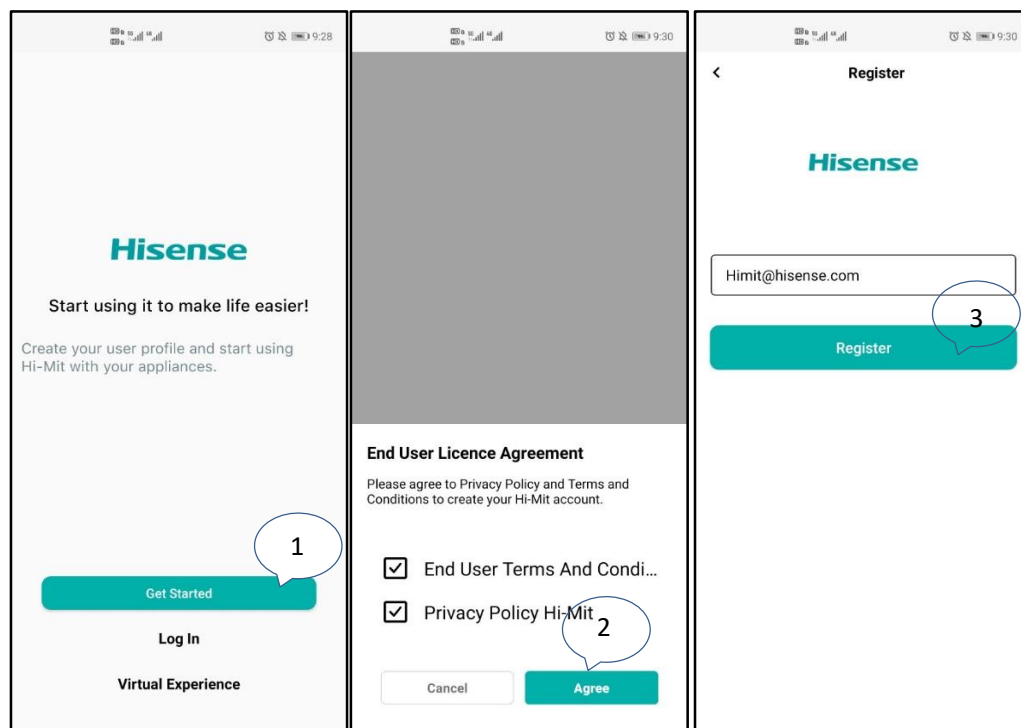

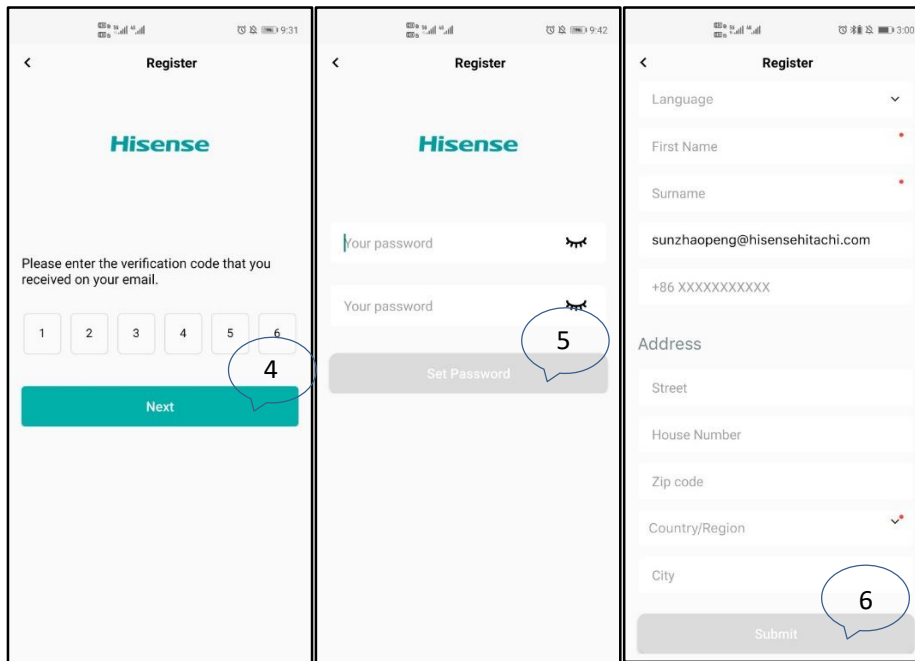


Log in

After registering the Hi-Mit account, you can log in the App.

- 1 Run the Hi-Mit App and click “Log In”.
- 2 Enter your account and password, and click “Log In”.

Note: If you are prompted for a wrong email or password, please confirm that the account and password entered are correct and try again.

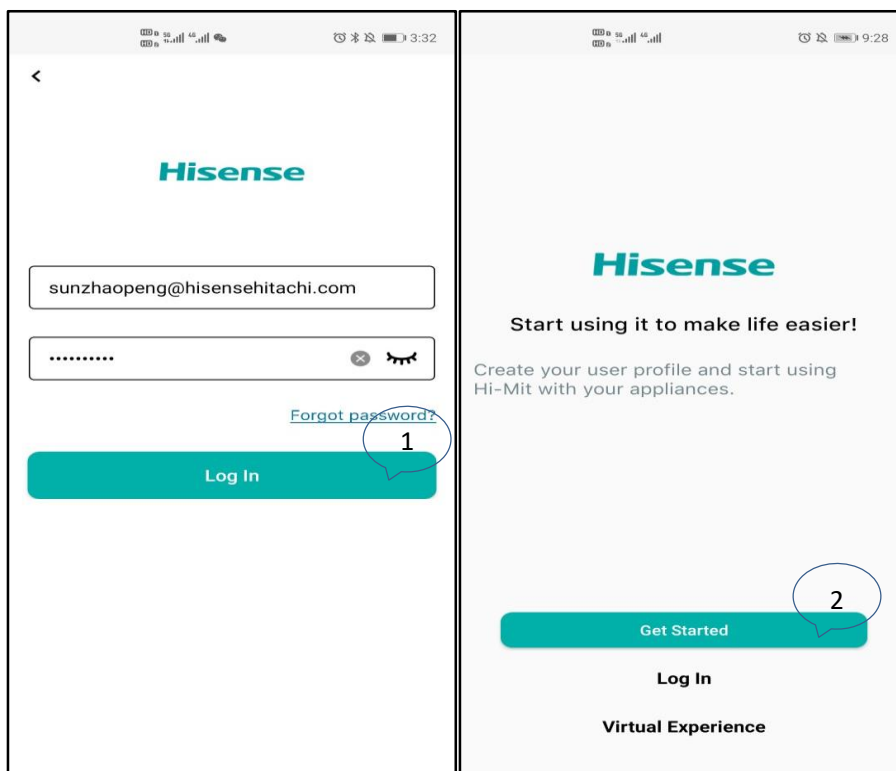

Reset password

- 1 If you forget your password, click “Forgot Password” to reset it.
- 2 Enter the account for which you want to reset your password, and click “Get Verification Code”. You will receive a 6-digit verification code in your email.
- 3 The subsequent steps are the same as those for account registration. Enter a valid 6-digit verification code and click “Next”.
- 4 Enter a new password and click “Set Password”.
- 5 Click “Confirm”.

Note: If you do not receive an email, please contact hisense.vrf.iot@hisense.com.

The image displays two sequential screenshots from a mobile application interface for password reset.

Left Screenshot (Step 1): The screen shows the Hisense logo at the top. Below it is a text input field containing the email address "sunzhaopeng@hisensehitachi.com". Underneath the email field is a "Password" label and a text input field with a visible password icon (an eye). To the right of the password field is a link labeled "Forgot password?". A blue circle with the number "1" highlights this link. At the bottom is a grey "Log In" button.

Right Screenshot (Step 2): The screen is titled "Change Password". It features the Hisense logo and a message: "To reset your Hi-Mit password, enter the email address you use to log in." Below this message is a text input field containing the email address "sunzhaopeng@hisensehitachi.com". A blue circle with the number "2" highlights this input field. Below the email field is a teal button labeled "Get Verification Code".


Group management


Create group

You need to create a group to enter the control home page and access to functions of the App. The steps are as follows:

- 1 Click “Add Group”.
- 2 Click “Group Name” to enter the group name.
- 3 Click “Select Image” to select background image of the group or upload the image by yourself.
- 4 Click “Create” to create a group. The group creator will become the administrator of the group.


If you select the “Join To Group”, this function allows you to join other groups via an administrator’s invitation.

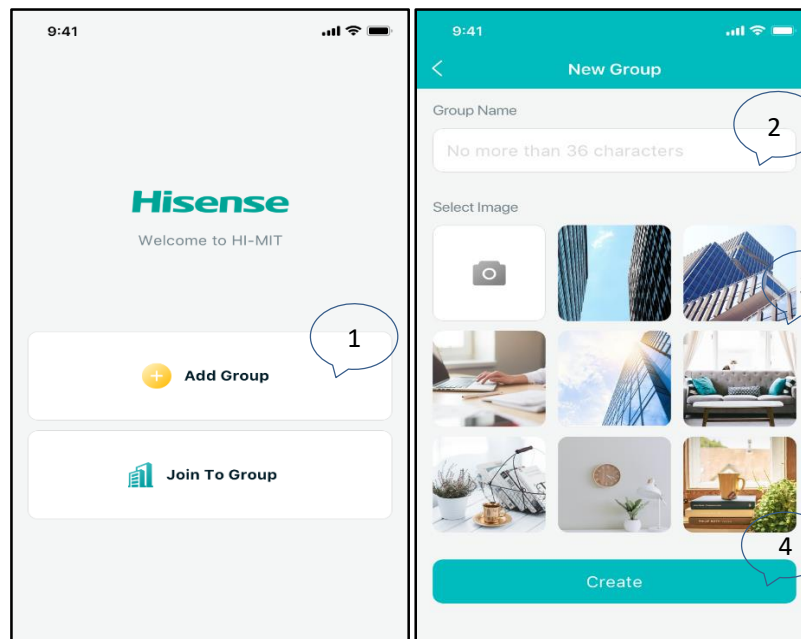

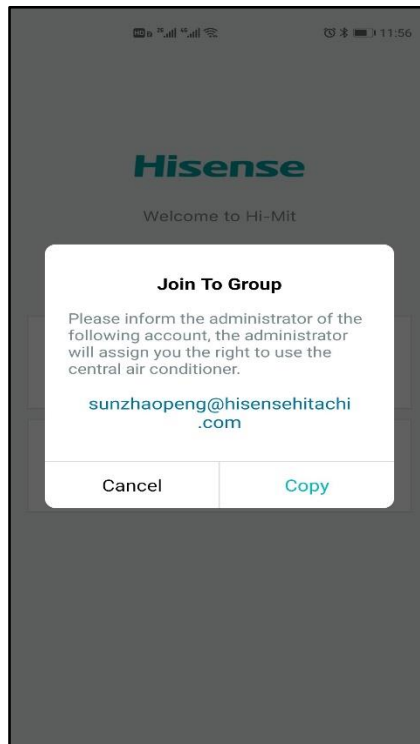

Note: In addition to the above, you can add a group in the following two ways

1. Click the group name in the Home interface, and click “+” in the drop-down list to create a group.
2. Click the “Member Management” in the “Me” interface, and click “+” to create a group.

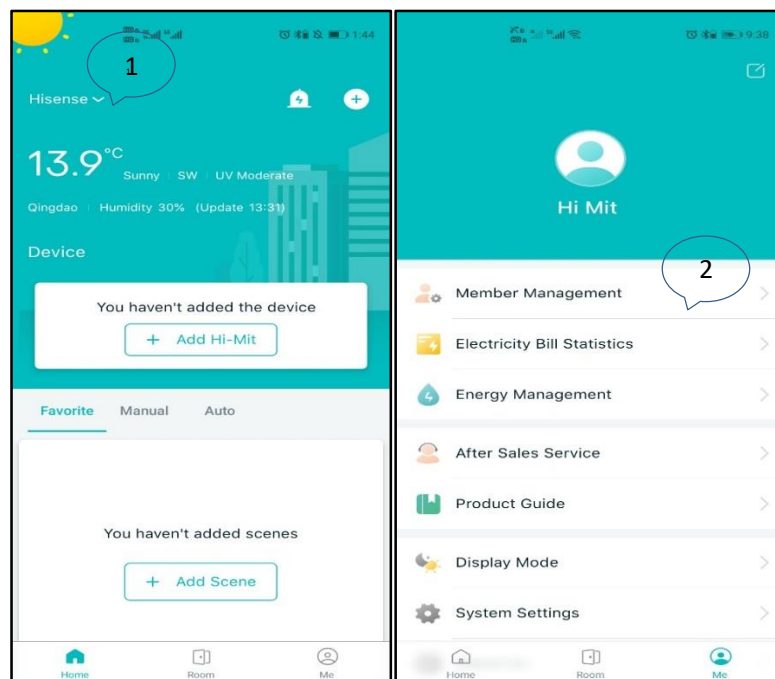


Edit group

You can edit a group as an administrator as follows:

- 1 Click the editing button.
- 2 Click "Group Name" to change the group name.
- 3 Click "Select Image" to change background image of the group.
- 4 Click "Confirm" to complete editing of the group.

To delete a group in "Member Management":


Click "Exit" to exit the current group.

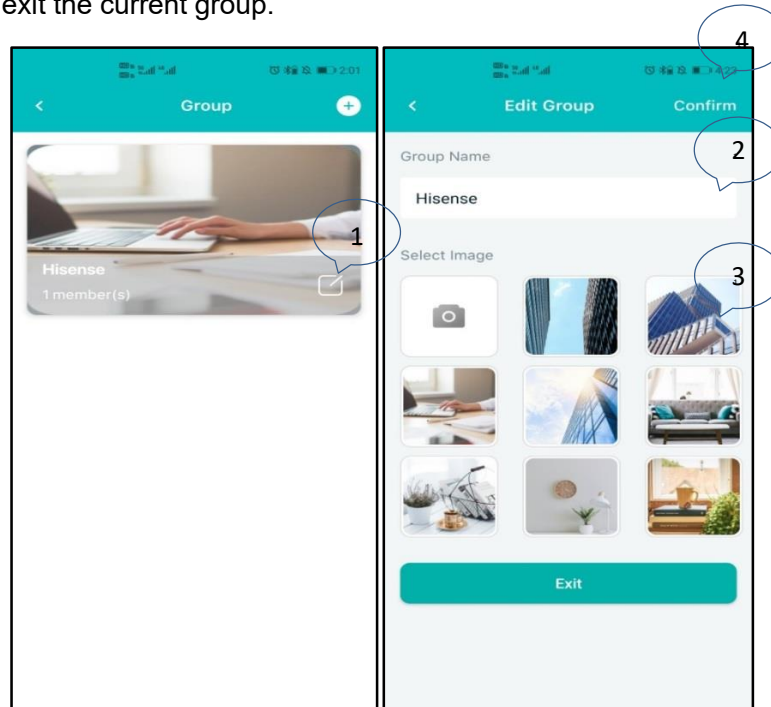

Invite member

The user who creates the group will become the group administrator, who can invite other members to join the group by adding an account as follows:

- 1 Click background image of the group name on the Group page.
- 2 Click the “+” in the upper right corner.
- 3 Enter Hi-Mit account of the invitee or account of any other ConnectLife product, and click “Search”.
- 4 When the account is found, click “Add To”.

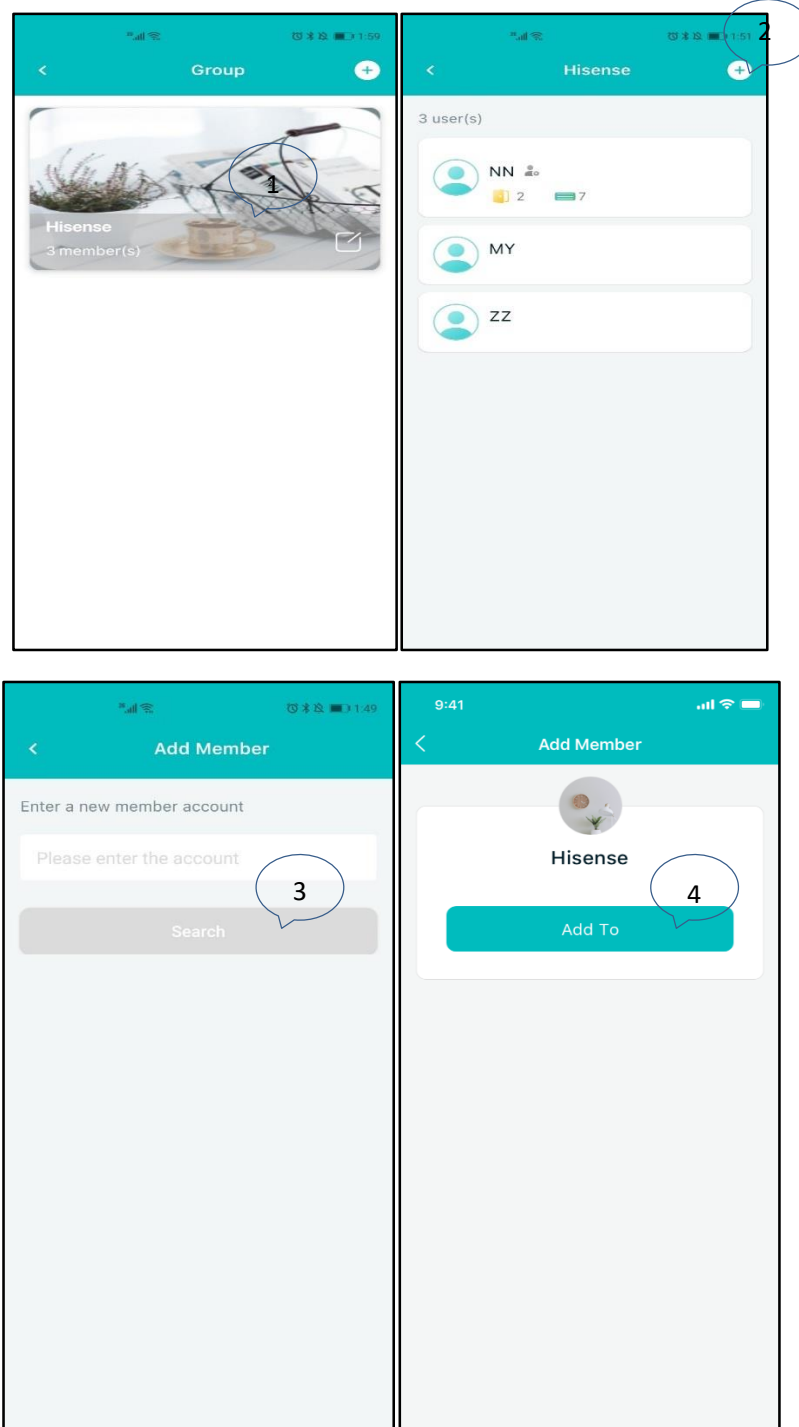


Assign rights to members


The rights of the administrator are higher than those of the members. The rights of the administrator include assigning the right to use the device, transferring authority of the administrator, deleting the member and so on.

The operation steps are as follows:

- 1 Click the member list.
- 2 Click the “+” at the bottom of the page.
- 3 Select the device to be shared with members.
- 4 Click “Confirm” to assign the right to use the device.
- 5 Click the list “...” in the upper right corner, select “Referral Management” to transfer the administrator authority to a member, or select “Delete Member” to delete a member from the group.

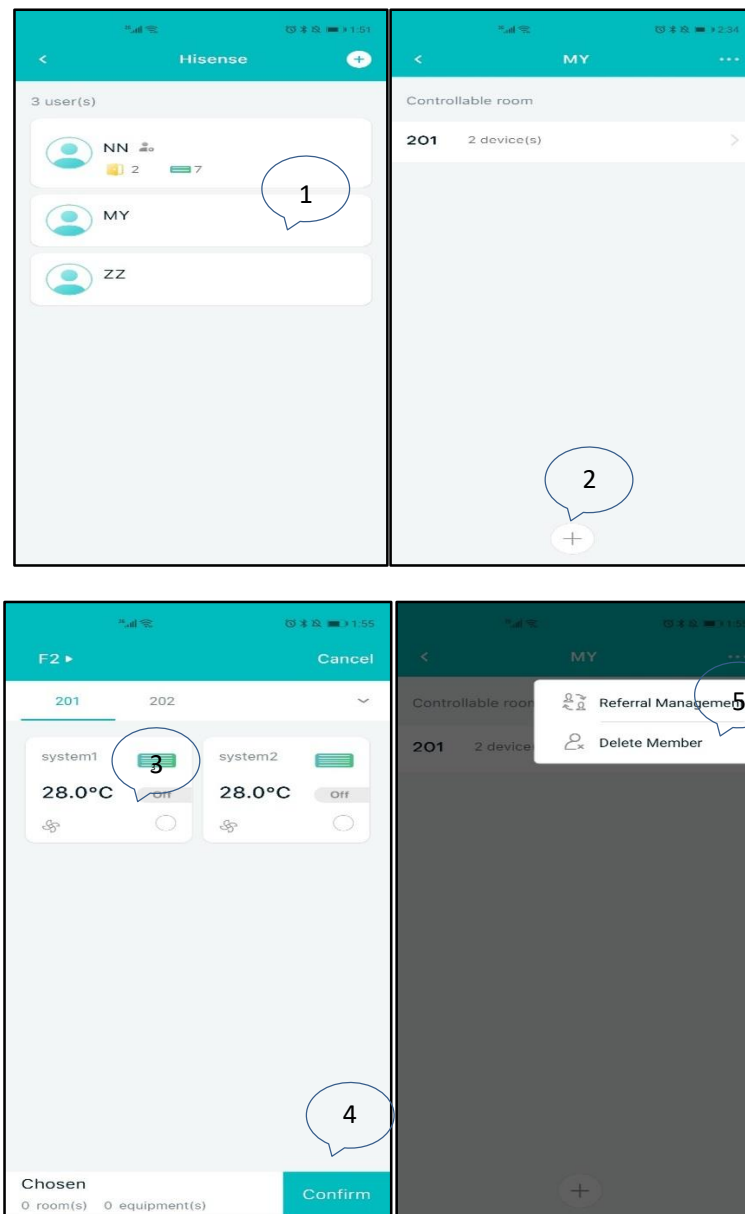

Note: You can swipe the member name list or room list left to select the member or room to be deleted.

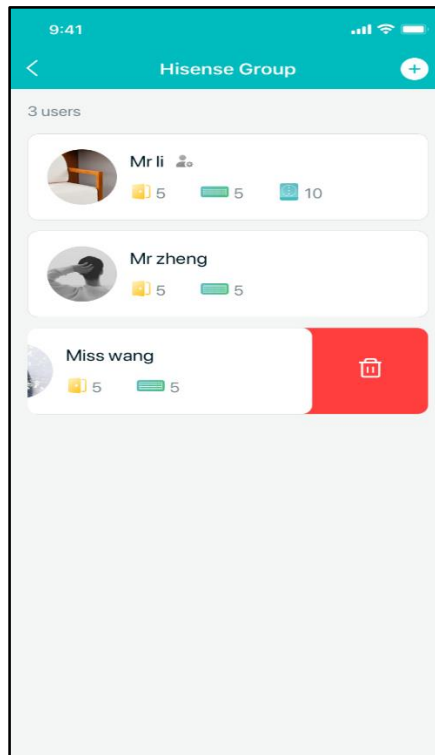



Add Hi-Mit

Only after the Hi-Mit adapter is bound and the air conditioning devices are found, centralized management and remote control of the air conditioners can be realized by the App.

AP Network

Bind the adapter device with a wireless network.

- 1 Click "Add Hi-Mit".
- 2 Operate according to the prompts on the App page and click "Search".
- 3 Enter the router account and password, and click "Connect".

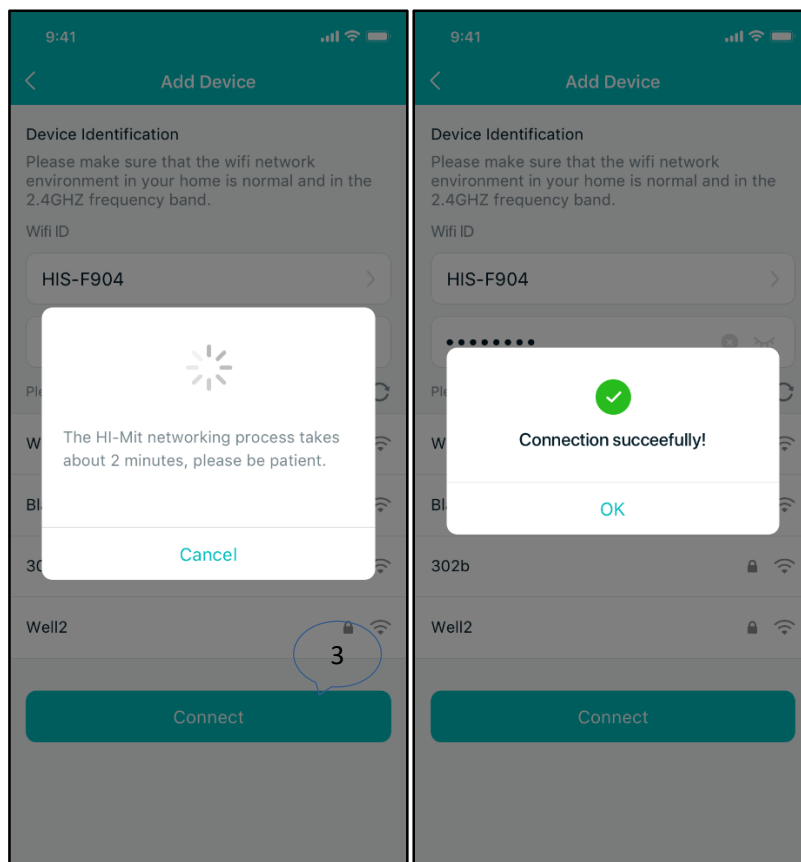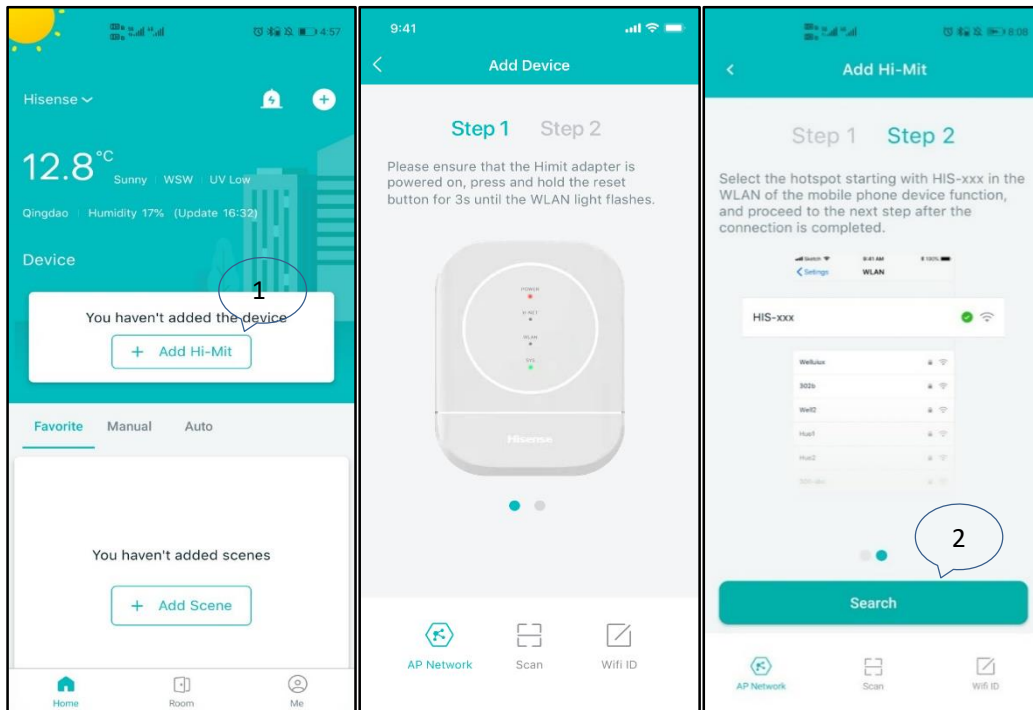


SCAN

Bind the adapter device by scanning the QR code after the WLAN light on the Hi-Mit adapter in the wired network is always on.

Note: For the QR code, see the image on the back of the adapter.




- 1 Click "Add Hi-Mit".
- 2 Select "Scan" and operate according to the prompts on the App page.

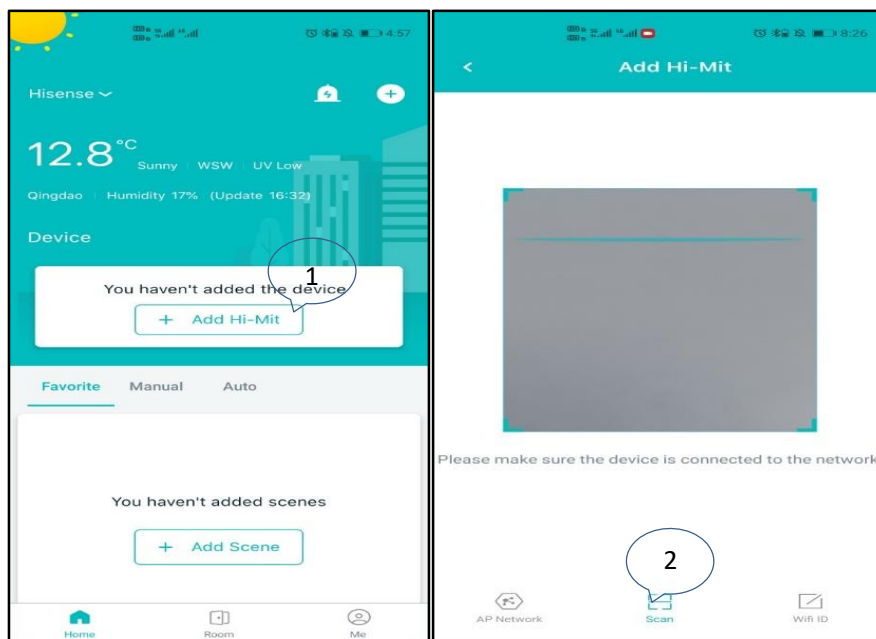


Wifi ID

Bind the adapter device by entering the Wifi ID and verification code after the WLAN light on the Hi-Mit adapter in the wired network is always on.

- 1 Click “Add Hi-Mit”.
- 2 Enter “Wifi ID” and “Verification Code”, and operate according to the prompts on the App page.

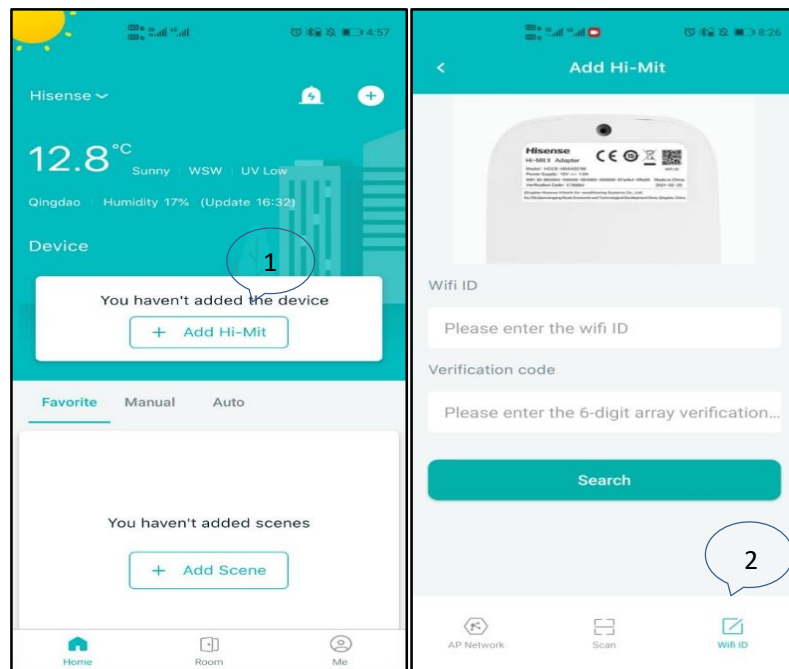


Note: Himit adapter can only be applicable in a 2.4Ghz network environment, and the router is required to conduct automatic acquisition of ip. In addition to the way shown in Fig.①, the Hi-Mit can also be added by the ways as shown in Fig.② and Fig.③.

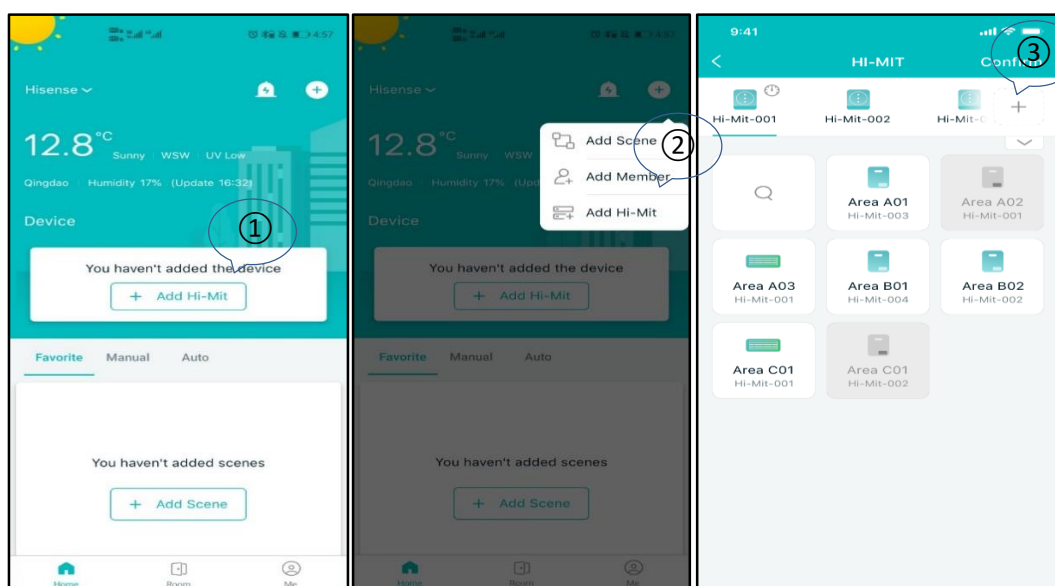

Replace/ Remove router

- 1 Click “Hi-Mit”.
- 2 Click “Replace router” and “Remove”.


Note: After the Hi-Mit adapter is removed, all device information will be deleted. Please use with caution.

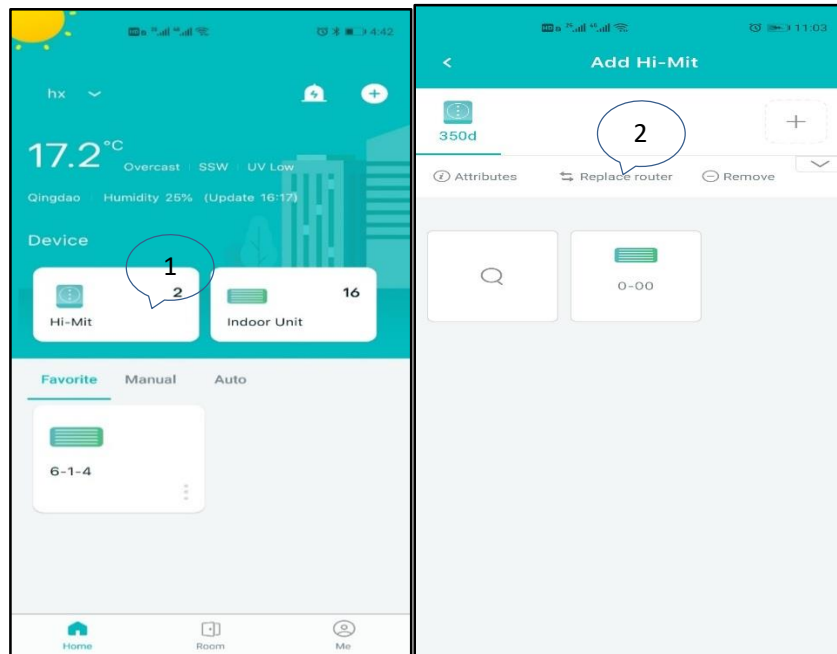

Search/add device

Search device

After binding the Hi-Mit as follows, click “OK” to search the air conditioners.

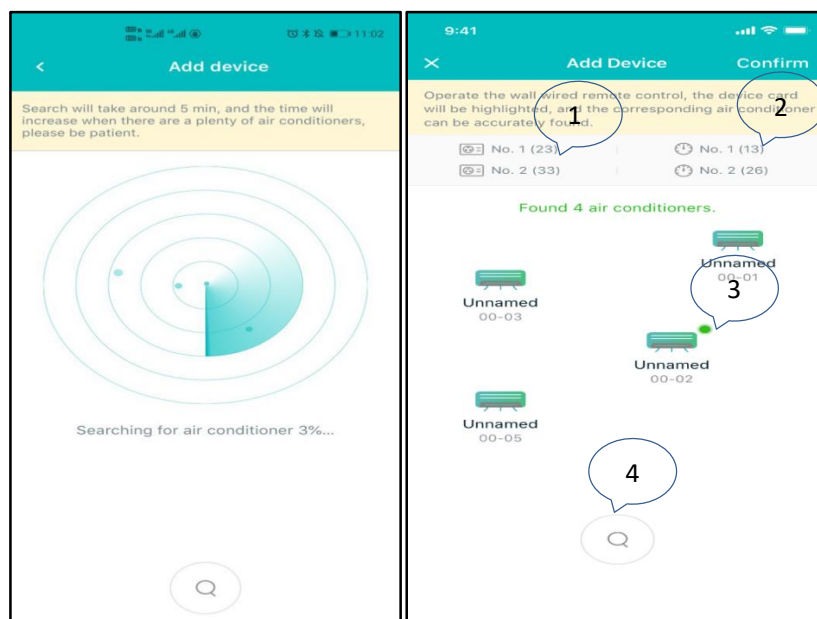


Note: In the Add Device interface, the system number and address number of air conditioning devices are as shown at 1; address number of the electricity meter (it will be hidden if there is no electricity meter) is as shown at 2; the devices currently in the power-on state are as shown at 3; If the number of devices found is inconsistent with the actual number, please click the area indicated by 4 to search again.

Add device

Various control functions of the air conditioning devices that are found are accessible only when they are added to a room. When a group is created, a floor and a room are already created by default. You can add air conditioning devices directly.

Add the air conditioning devices to a room as follows.


- 1 Click the “Device Card”.
- 2 Click “Floor” to select a floor.
- 3 Click “Room” to select a room.
- 4 Click “Rename” to change the device name.
- 5 Click “Confirm” to confirm the change.
- 6 Click “Confirm” to go back to the home page after all the air conditioning devices have been assigned a room.

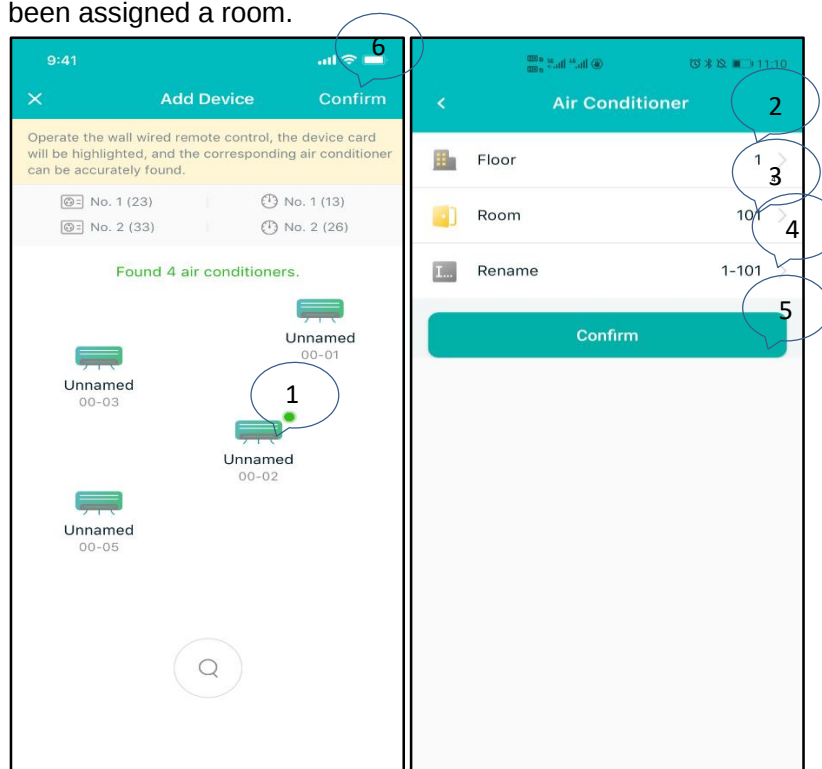

Note:

If any device is not added to a room, you can add it again as follows:

1. Click the “Hi-Mit” icon.
2. Click the device image to assign a room.

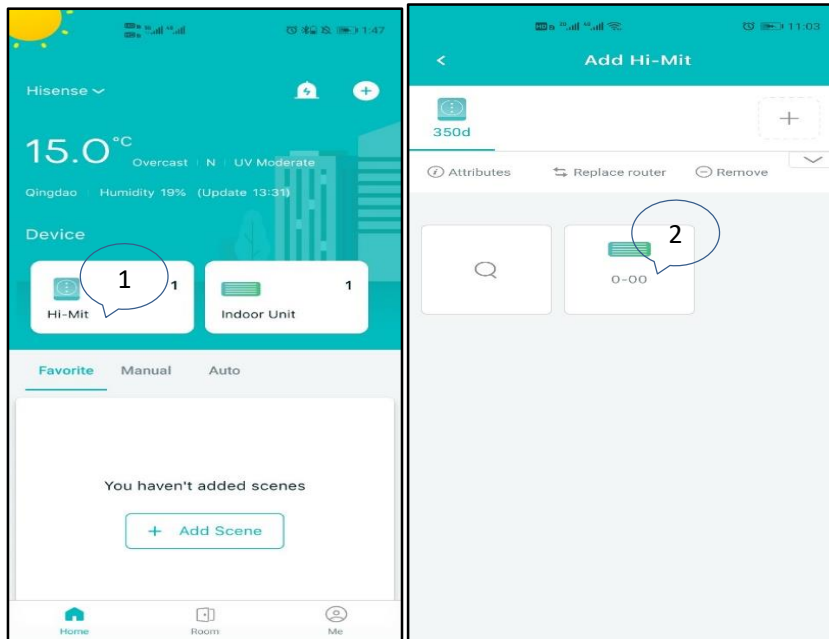


Set Hi-Mit attributes

Edit name of outdoor unit

The steps are as follows:

- 1 Click the “Hi-Mit” image on the home page.
- 2 Click “Attributes”.
- 3 Click “Outdoor Unit Name” to edit name of external machines.
- 4 Click “Relationship” to view the online relationship diagram of indoor units and external machines.
- 5 Click “Wifi Software Version” to upgrade the Hi-Mit adapter software.

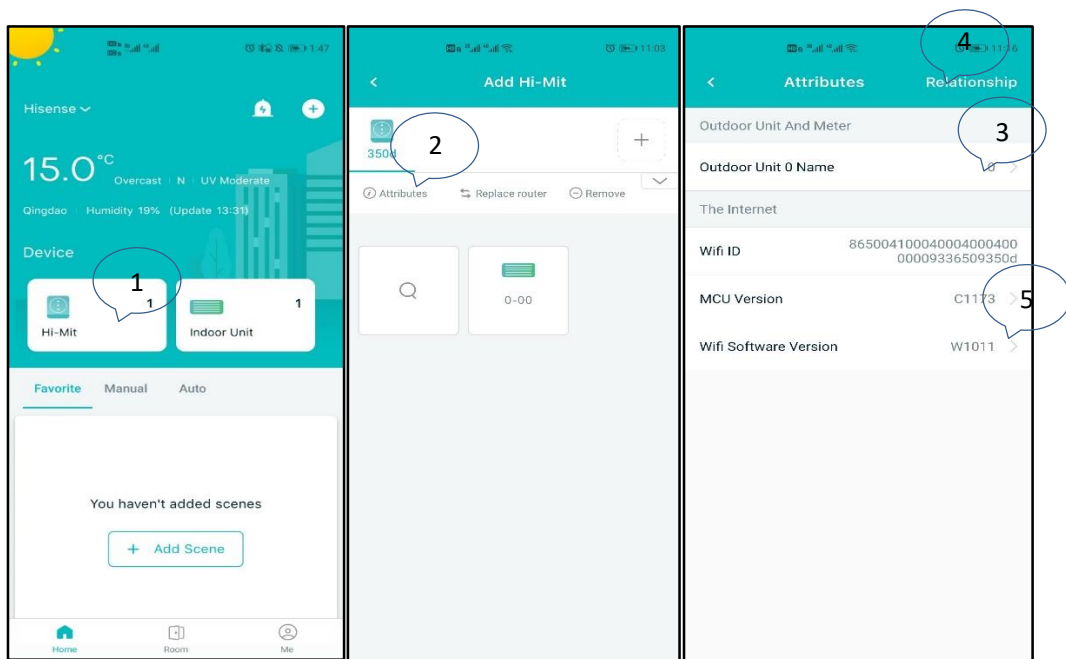


Edit floor/room

To cater to the various requirements of users, the App manages the air conditioning devices by creating floors and rooms.

Add room

The steps are as follows:


- 1 Click the “+” to open the drop-down list.
- 2 Click “Add Room”.
- 3 Enter the room name.
- 4 Click “Confirm” to add a new room;

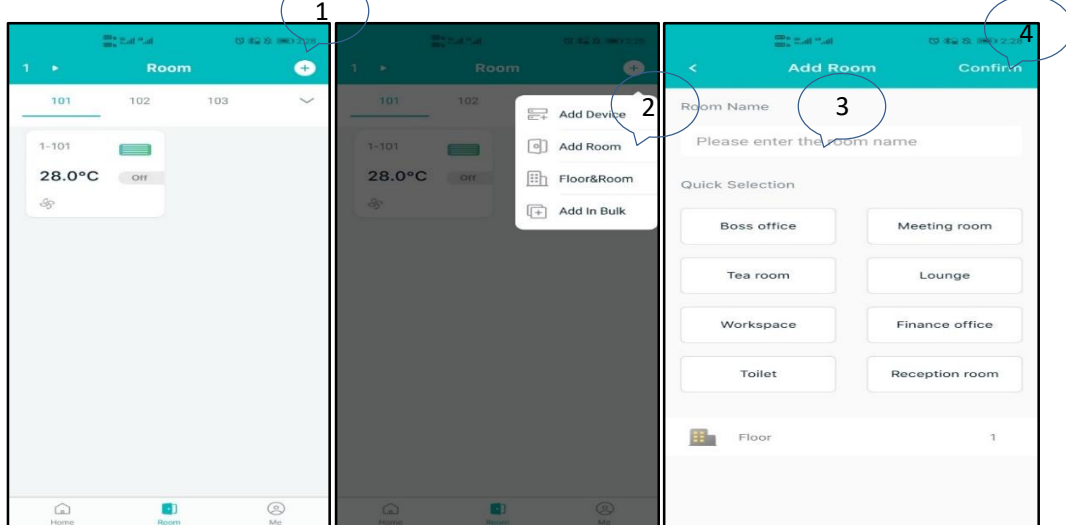

Add floor

The steps are as follows:


- 1 Click the “+” to open the drop-down list.
- 2 Click “Floor & Room”.
- 3 Click the “+”.
- 4 Enter the floor name and click “OK” to add a new floor.

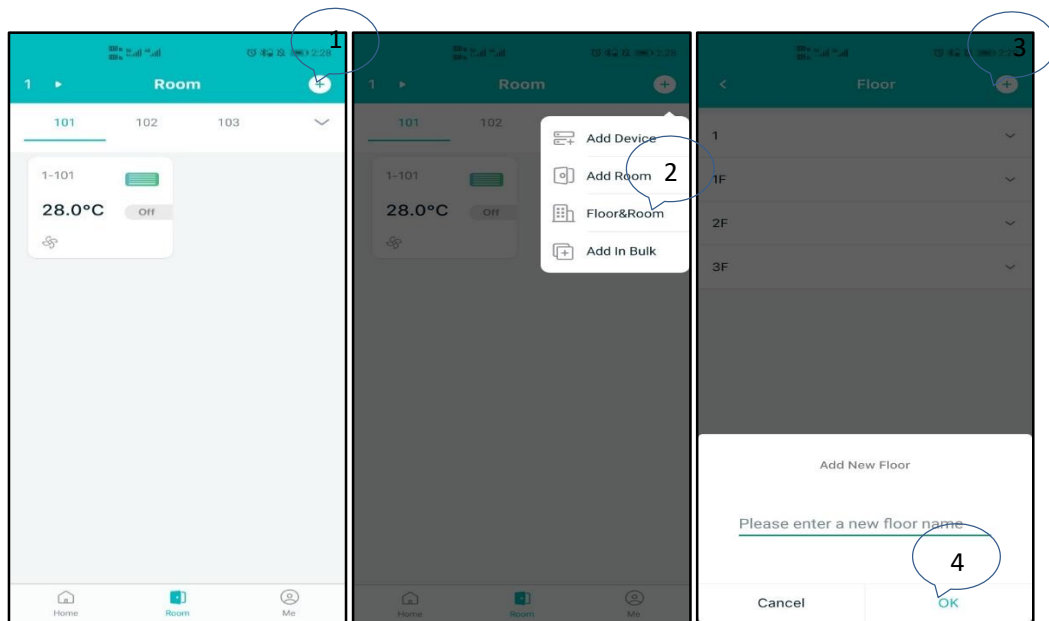

Add in bulk

The steps are as follows:

- 1 Click the “+”..
- 2 Click “Add in Bulk”.
- 3 Select the number of floors and rooms, and click “Confirm” to add in bulk.

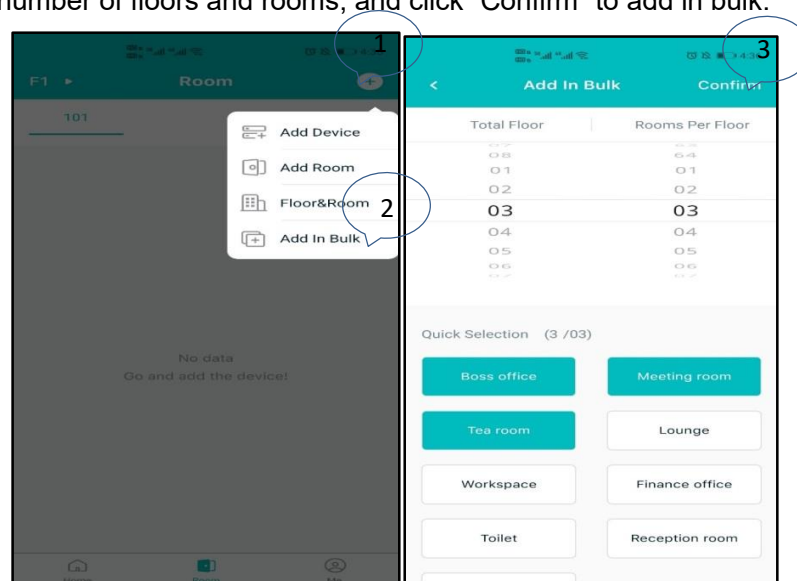


Notes:

1. The maximum number of floors in the App is 8.
2. The number of rooms should be the same as that of room names when adding in bulk.
3. The floors added in bulk shall be named as 1F-8F.

Edit floors/rooms

The steps are as follows:


- 1 Click “Floor & Room”, click the name of room , click “Delete” or “Rename” to edit the room.
- 2 Click “Floor & Room”, click the floor list and swipe it left, click “Delete” or “Rename” to edit the floor.

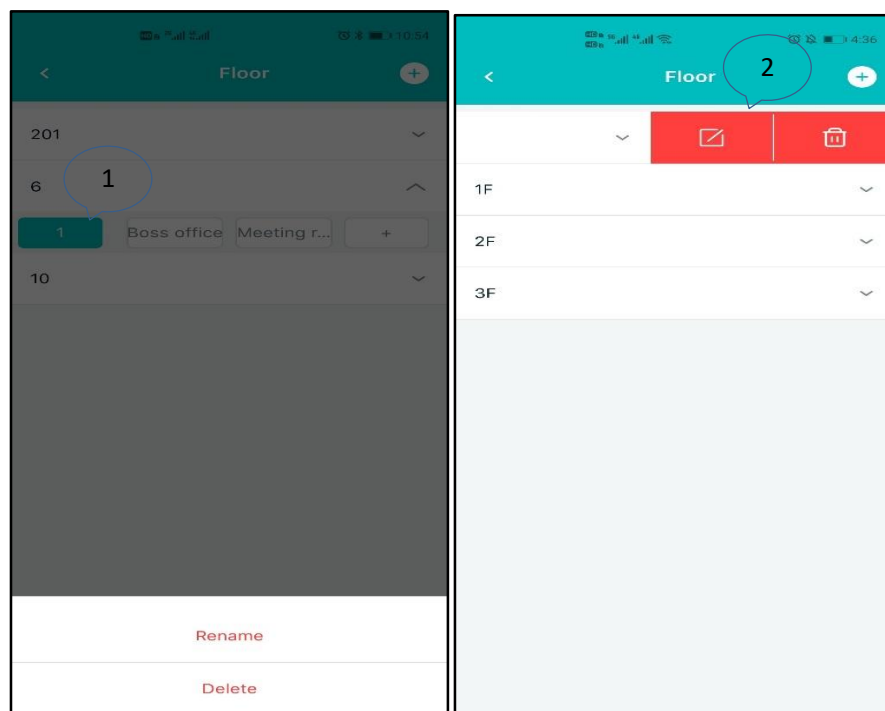

Delete/add devices

Delete or add the devices as follows

- 1 Press and hold the Device Card.
- 2 Select the device card to be deleted and click the “Delete” button.
- 3 Click “+” and select “Add Device” to add the device to the room.


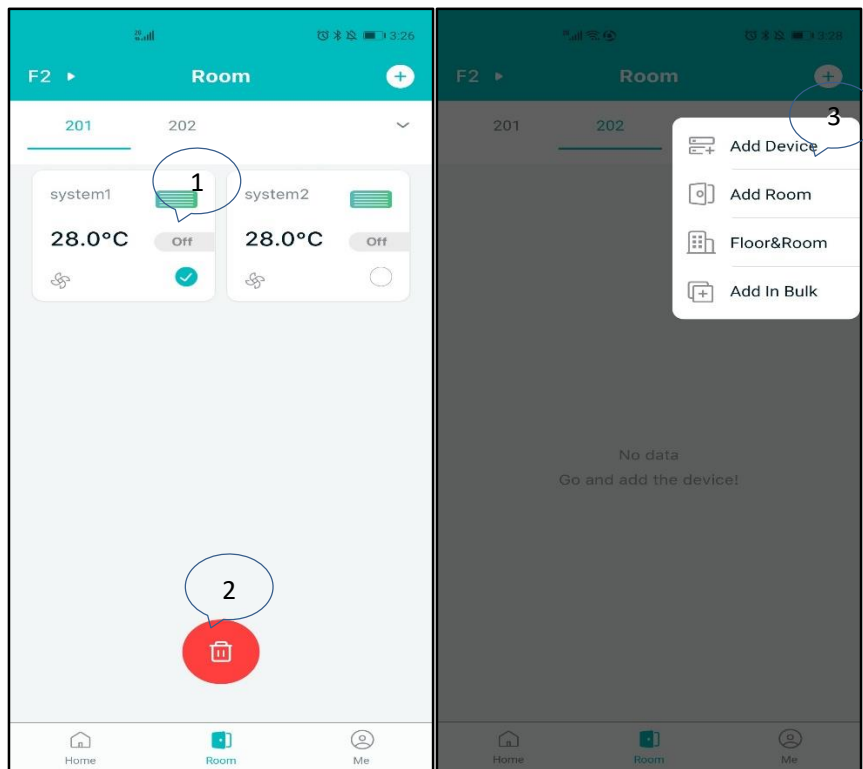


Add scene

Create smart scenes for easy control of air conditioning devices.

Create manual scene

- 1 Click "Add Scene".
- 2 Click "Manually".
- 3 Enter the scene name.
- 4 Click "Add Task".
 - ① Select the device type.
 - ② Select the device to be added.
 - ③ Select the command (on/off, mode, fan speed, temperature, etc.) to be controlled, and click "√" to confirm.
 - ④ Click "Confirm".
- 5 Select scene icon.
- 6 Click "Confirm".

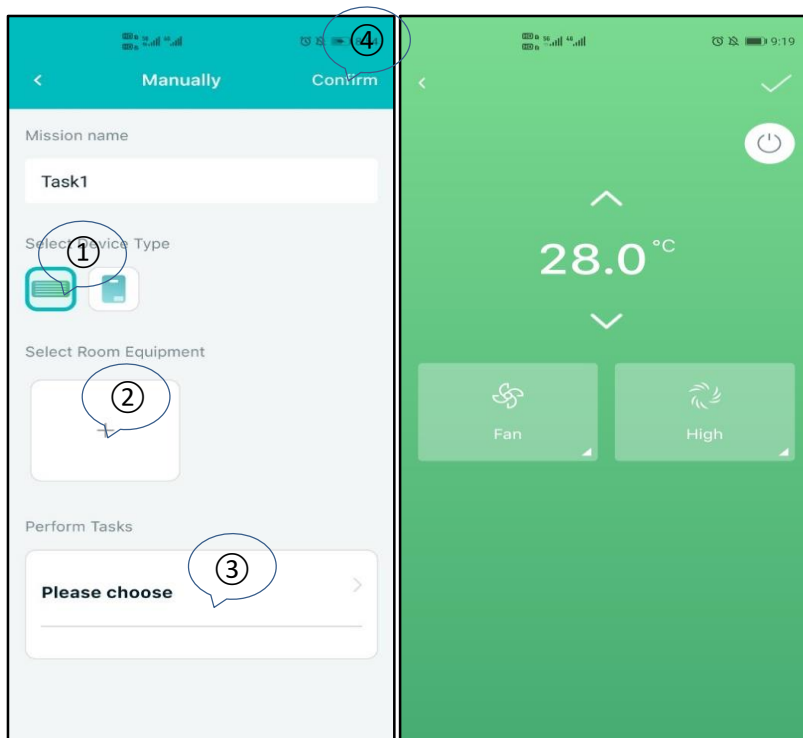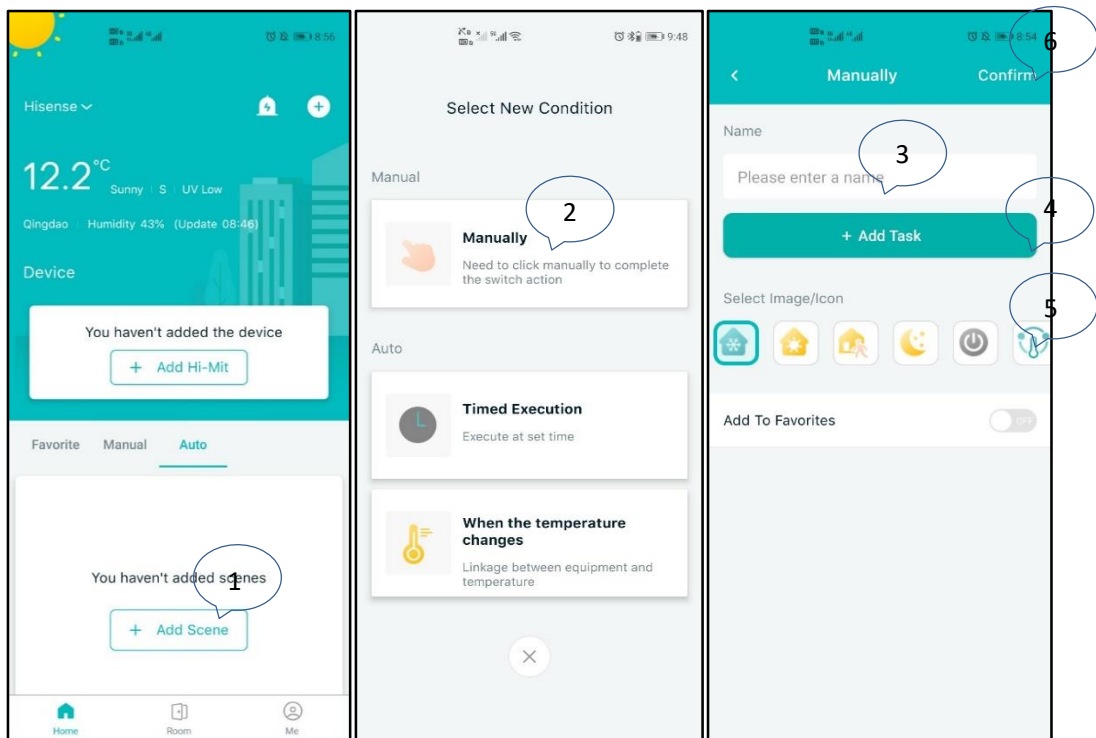

Note: You can click the “Add to Favorites” to add the scene to the “Favorite” list.

Create timed scene

The creation process is similar to that of the manual scene above, except that the setting of timed execution conditions is different:

- 1 Click “Timed Execution”.
- 2 Select time and date.
- 3 Click “Confirm”.

The image displays two side-by-side screenshots of a mobile application interface for creating a timed scene.

Left Screenshot (Timed Execution screen):

- Header: Teal bar with a back arrow, "Timed Execution", and "Confirm".
- Section: "Name" with a text input field containing "Please enter a name".
- Section: "If The Conditions Are Met" with a radio button selected for "Timed Execution" (indicated by a circled '1'). Below it is the text "Please select time".
- Button: "+ Add Task" (teal).
- Section: "Select Image/Icon" with a row of icons: a house with a snowflake, a house with a star, a house with a person, a moon, a power button, and a thermometer.
- Section: "Enable Now" with a toggle switch set to "OFF".
- Section: "Add To Favorites" with a toggle switch set to "OFF".

Right Screenshot (Confirm screen):


- Header: Teal bar with a back arrow, "Timed Execution", and "Confirm" (indicated by a circled '3').
- Time Selection: A grid showing hours (09 to 15) and minutes (59, 00, 01, 02, 03, 04, 05). The time "12:02" is selected (indicated by a circled '2').
- Section: "Select Days" with buttons for Sun, Mon, Tue, Wed (highlighted with a teal border), Thur, Fri, and Sat.

Note: You can click “Enable Now” to directly open the timed scene that has been created.

Create temperature linkage scene


The device is linked according to the temperature value detected by the air conditioner, in order to realize flexible and changeable use scenes. The creation process is similar to the above process, except that the scene conditions are different.

- 1 Click “When the temperature changes”.
- 2 Select the air conditioner used as the temperature condition. Select the temperature condition and click “√”.
- 3 Click “Confirm”.

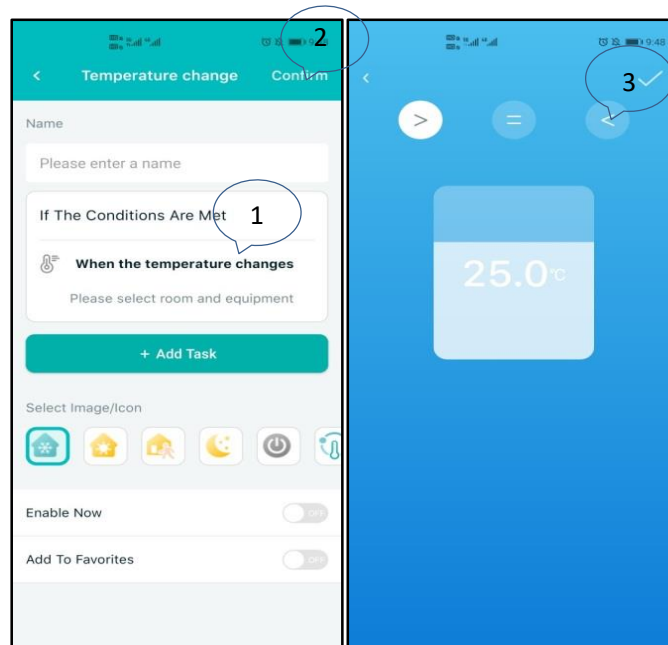

Note: The scene can be created by the following two ways.

1. Click “Add Scene” on the Home page.
2. Click “+” on the Home page and click “Add Hi-Mit”.

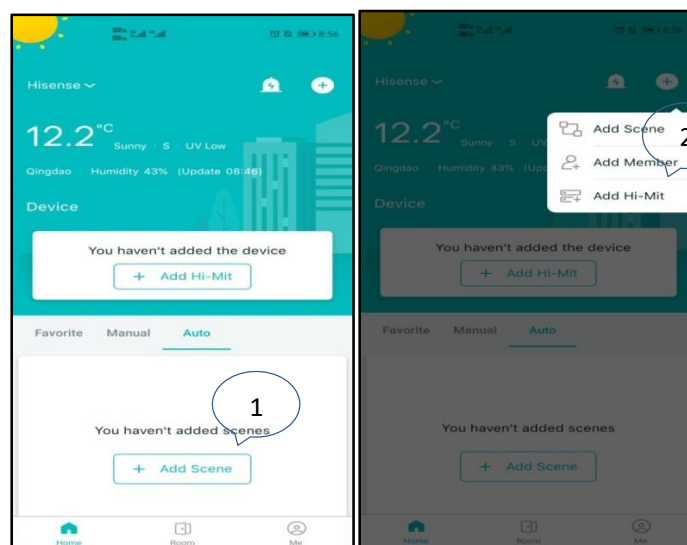

Control air conditioner

VRF

The control page has the following main control functions:

- 1 On/off setting.
- 2 Temperature setting.
- 3 Mode setting: heating, cooling, fan, dry.
- 4 Fan speed: high, mid, low.
- 5 Louver setting: uniform control of louvers of 1st-7th angles.



Note: The specific functions are subject to the actual air conditioner.

Water module

The control page has the following main control functions:

- 1 On/off setting.
- 2 Temperature setting.
- 3 Mode setting: heating(wind_disk,swimming_pond,hot_water,floor_heating), cooling(wind_disk).



Me

Function introduction

- 1 Click "Member Management" to edit and manage the member.
- 2 Click "Electricity Bill Statistics" to obtain electricity bill statistics of the air conditioning system.
- 3 Click "Energy Management" to show energy consumption of the air conditioning system.
- 4 Click "After Sales Service" to request for repair online.
- 5 Click "Product Guide" to view related introduction of product functions.
- 6 Click "Display Mode" to switch the day and night mode.
- 7 Click "System Settings" to set App language, temperature display and so on.
- 8 Click "About Us" to view version number of the App and adapter, etc.

